

HARKEN®

Bullet™ Exit Block With Cam and Angle Bracket

Part Number: 197

Harken, Inc.

N15W24983 Bluemound Rd., Pewaukee, WI 53072-4974 USA

Telephone: +1 262 691-3320 • Web: www.harken.com • Email: harken@harken.com

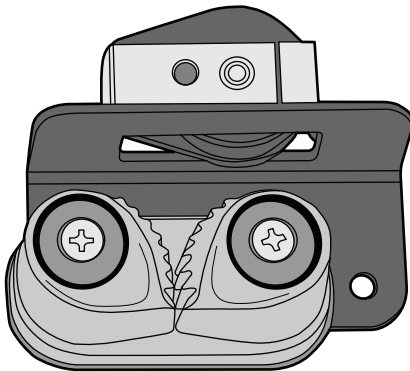


Figure 1

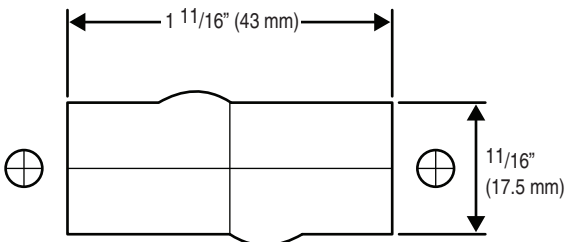


Figure 2

Installation

1. Cut hole using template (Figure 2).
2. Insert block and position angle bracket over block (Figure 1).
3. Secure block and angle bracket to surface with self-tapping screws, strong pop rivets or through-bolt with machine screws.
4. Mount Cam-Matic® to angle bracket so cleat is in line with exit block.

Maintenance

Harken, Inc. equipment is designed for minimal maintenance, but some maintenance is required to give the best service and to comply with the Harken, Inc. limited warranty.

In general, the most important aspect of maintenance is to keep your equipment clean by frequently flushing with fresh water.

In corrosive atmospheres, stainless parts may show discoloration around holes, rivets and screws. This is not serious and may be removed with a fine abrasive.

With the exception of winches, do not use grease unless specifically recommended in the instruction manual.

Many Harken, Inc. products are provided with specific instruction manuals that detail maintenance procedures. Manuals are available at no charge by contacting Harken, Inc. or a Harken, Inc. distributor.

Small Boat Blocks: The plastic sideplates and sheaves of small boat blocks are UV stabilized, but they may turn grey after exposure to the sun. This discoloration may be removed with a fine abrasive, but will not reduce the strength of the blocks.

Flush small boat blocks frequently with fresh water. Periodically clean blocks with detergent and water to remove salt and dirt. Lubrication is not required, but lubricants which will not attract dirt may be used. Examples are dry Teflon® or dry silicone sprays.

Inspect blocks periodically for damage. In particular, inspect shackles and swivel posts for cracks, corrosion, or elongation. When replacing shackles, be sure to use Harken, Inc. parts to maintain the proper strength. Use Loctite® when refastening nuts or screws. Tape cotter rings to prevent snagging.

Teflon is a registered trademark of E. I. du Pont de Nemours and Company or its affiliates.

Loctite is a registered trademark of Henkel AG & Company KGaA.

Warranty

See the Harken, Inc. catalog for full maintenance and warranty information.